


TECHNICAL SPECIFICATION

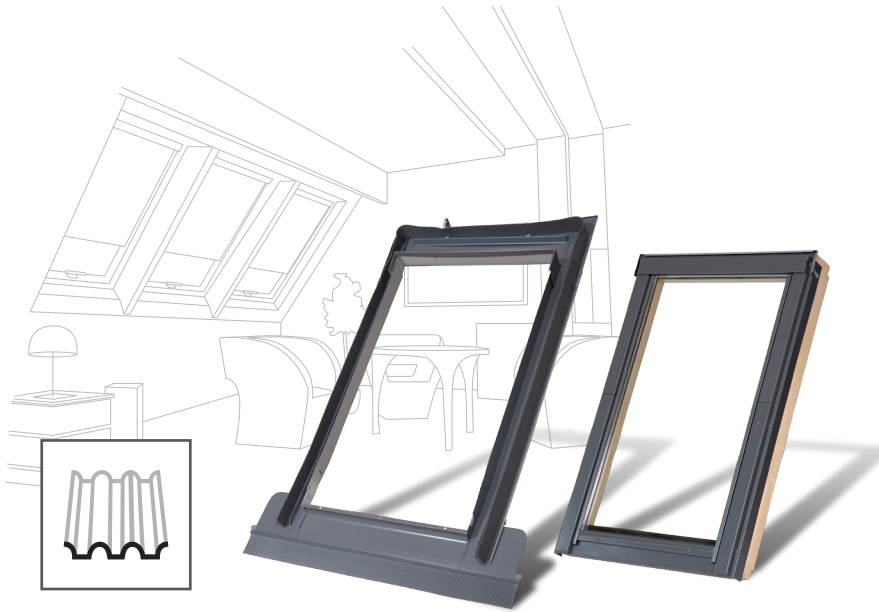

TFX TILE FLASHING 16 - 50 mm

Applicable

In roof pitch range of 15°-90°

Tile profile height 16-50 mm

Features

Perfect watertightness

Easy installation

Weather and UV ray resistant

Painted grey

Lead free


Foam gasket

Alu apron to ensure a perfect seal to profiled roofing materials

Material

Aluminium

Powder coated grey, RAL7043

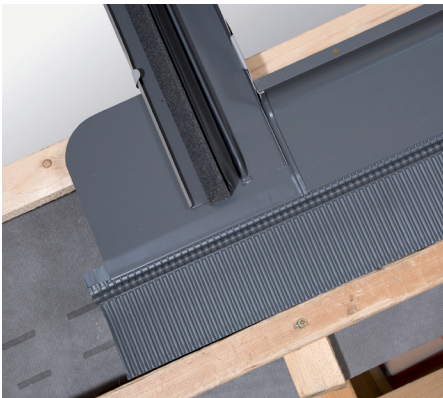

FLASHING COMPATIBILITY TABLE

WINDOW SIZE CODE	TILE FLASHING CODE
C2A	TFXC2A
C4A	TFXC4A
F6A	TFXF6A
M4A	TFXM4A
M6A	TFXM6A
M8A	TFXM8A
S6A	TFXS6A