


# Adjustable wedges

Strong, stable, durable and easy to work with, Wedgit® is the modern levelling solution.

In a highly competitive industry, costs are always a major consideration. Whilst the use of waste wood is, on the face of it, an efficient use of material, the labour overhead in preparing wooden wedges can be considerable, especially when trial and error is involved. Moreover, wood has many inadequacies compared with plastic. It is not of consistent density and is difficult to stabilise. There is the risk of splitting during fitting, whilst temperature and humidity have marked affects both dimensionally and structurally.

The advantages and convenience of a ready made, fully adjustable component such as Wedgit is obvious. Not only is it cost effective as a building component but also as insurance against more costly bills for rework in course of time.

Wedgits range in size with load bearing capacities from 80 to 6750kg. Maximum load capacity is attained when the opposite ribbed surfaces in a pair of wedges fully interlock with one another. Tooth-like ribbing is moulded into the surfaces to ensure a precision grip so that they exactly match to form a secure block for fitting. Driving the pair in opposition achieves incremental adjustments of about 0.5mm for levelling purposes, and once in position they can be nailed through for final fixing.

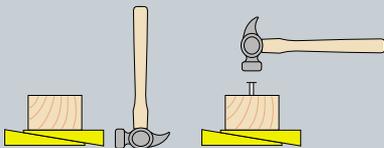






Nine different colours make it easy to identify the right size for the job.

To vertically align door and window frames, the orange wedge features a central slot to accommodate a screw or dowel.

Wedgit is also durable. Accelerated ageing tests show an unchanging bearing capacity over 100 years at 20°C and over 50 years at 35°C (floor heating).

Polyethylene (PE) is easy on the environment too. It gives off carbon dioxide and steam when burned and is non-polluting.

# Wedgit® 2 level it

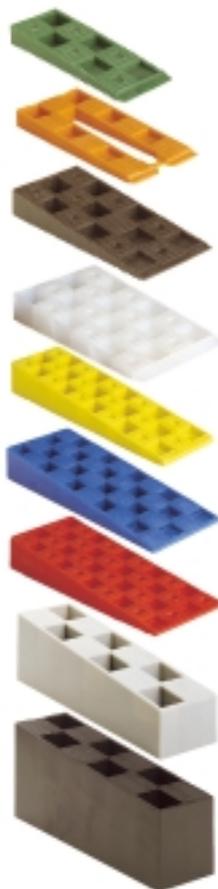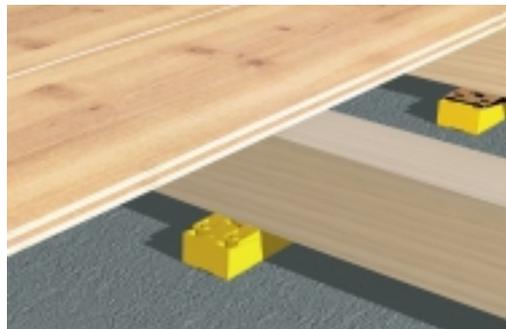

Colour	Height mm	Width mm	Length mm	Max load kg
Green	10	30	80	200
Orange	8	40	80	200
Brown	15	45	90	1700
White	15	60	90	2000
Yellow	25	45	150	2200
Blue	25	60	150	2250
Red	25	60	150	6750
Grey	50	45	150	530
Black	70	45	150	515

## Features:

- Quick and easy to apply
- Excellent load capacity
- Folded pairs present parallel faces
- Interlock to prevent slippage
- Compatible interlock across sizes
- Will not split when nailed
- Moisture resistant
- Will not rot, corrode or shrink
- Good soundproofing characteristics
- Non-toxic emissions when burned
- Cost-effective and convenient

Made under certified ISO 9001 quality control procedures