



EASIHOLD

Technical Datasheet



PRODUCT DESCRIPTION


Easihold is a water-based, non-toxic, easy-to-use, airdrying resin binder that leaves stones, mulch & gravel permeable. Easihold is recommended to hold stones and mulch in place, 1/8 inch/4mm to 3/4 inch/20mm in diameter. **Suitable mulch types include bark, cedar and rubber mulch.**

Easihold is not suitable for vehicle traffic or frequent / heavy-duty traffic. Easihold is perfect for use on new or existing stones. Dirt and silt deposits need to be washed off prior to application - and ensure the weather conditions are good for the 72 hours post application.

USES

- Easihold is ideal for use around the garden where you require stones and mulch to stay in place.
- For example, Easihold can be used to stabilise stones and mulch in flower beds, garden perimeters, around stepping stones or wherever you find the pesky pebble stones interfering with your garden harmony.

HOW EASIHOLD WORKS

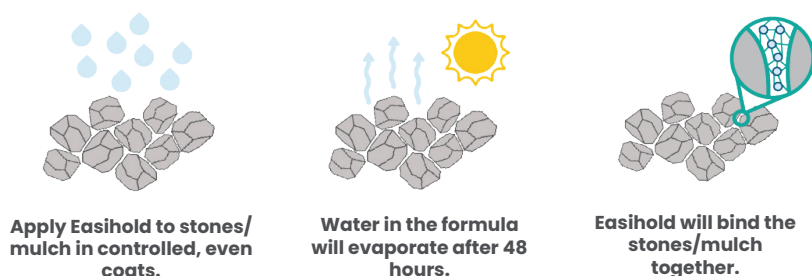

PROPERTIES

Type of Resin	Acrylic
Colour	White - clear once dry.
Viscosity	1 - 5 mpas
Drying time	12 - 36 hours depending on humidity and temperature.
Usage temperature	>5°C/41°F - minimum
Usage Humidity	>30%, <85%
Substrate requirements	Dry, solid & free draining surfaces.
Dilution	Not recommended
Cleaning	Very hot/boiling water & stiff brush
Packaging	Spray bottle of 27 fl. oz (800ml) bottle, 1.3 Gallons (5L) Jerry Can
Shelf-Life	24 months (in sealed, original packaging, 5-25°C/41-77°C)

AREA SIZE	AMOUNT PER COAT	AREA SIZE	AMOUNT PER COAT
1m ²	208ml	10ft ²	4.5 fl. oz.
2m ²	416ml	20ft ²	13 fl. oz.
4m ²	833ml	40ft ²	26 fl. oz.
8m ²	1666ml	80ft ²	52 fl. oz.

***1 full application = 3 coats.**



**800ml/27 fl oz or
5L/1½ gallon Jerry
Cans.**



**Allow 12 - 36 hours
to fully dry.**



**Ensure there will be
warm & dry conditions
for the next 72 hours
after application.**

1. SURFACE PREPARATION

- Prepare the subbase, ensuring it is free draining underneath desired surface.
- Ensure stones/mulch is clean from dirt and debris, ensuring any contamination is removed to ensure an effective bond.
- Cover surrounding areas to protect from spillages.
- Ensure the ground is dry before application and for 72 hours after to avoid dilution/wash away of Easihold.

2. APPLICATION ADVICE

- For new stones/mulch, we recommend to mix Easihold with the material before installation. This can be applied at a 1:25 ratio by weight. For existing stones/mulch, we recommend the spray application.
- Ensure you have correct tools for application method.
- Carefully follow the instructions outlined on our website.
- For areas receiving foot traffic, it is imperative that the top surface is compacted to avoid protruding stones.

SPRAY METHOD

1

Shake bottle well and pour Easihold into your sprayer. We recommend using an Airless Sprayer.

2

Apply the first coat to your clean and dry surface. Spray evenly, ensuring all areas are covered.

3

Once the first coat is applied, rake/turn the rocks/mulch to expose the uncoated material and apply a second coat

4

Compact the surface using a trowel or a flat piece of wood to ensure a smooth surface finish

5

After 24 hours, apply a final coat. Do not rake/turn the surface.

DO's

- ✓ Use a weed membrane under your surface.
- ✓ Spray at a slow & controlled pace, ensuring even coverage to all areas.
- ✓ Flush out your spray with warm water after use to avoid any blockages.

DONT's

- ✗ Don't over-saturate your surfaces - less is more!
- ✗ Don't dilute. Easihold is ready-to-use.
- ✗ Don't use on dirty or wet rocks/mulch.
- ✗ Don't apply to rocks/mulch on an impermeable surface.

AFTERCARE

- Keep the surface free from any weight or pressure for the first 24 hours after the final coat.
- Reapply every 12 months in high footfall areas and every 24 months for decorative use.
- Remove any loose stones to avoid further abrasion on remaining stones.

SUITABLE MULCH TYPES



BARK MULCH



CEDAR MULCH



RUBBER MULCH

STONE SIZE	BEST RESULTS	GOOD RESULTS	DO NOT RECOMMEND
4-7mm			
8-18mm			
19-25mm			
<4mm/>25mm			

SURFACE DEPTH	BEST RESULTS	GOOD RESULTS	DO NOT RECOMMEND
8-12mm			
13-20mm			
21-24mm			
<8mm/>25mm			



Store Easihold in a cool, dry place - protected from frost & direct sunlight.



Keep out of reach of children & pets.



Avoid contact with eyes and skin. Do not ingest. If contact is made, wash with water immediately.

*Whilst every precaution is taken to ensure that the information given in this literature is correct and up to date, it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded. Easihold reserve the right to amend and/or withdraw this document without notice. Intending purchasers of our materials should therefore verify with the company whether any changes in our specification, application details, withdrawals or otherwise have taken place since this literature was issued.

EASIHOLD

Global Manufacturing
Unit 8 Capital Park,
Annie Reed Road,
Beverley HU17 0LF
United Kingdom

Registered Address
Vuba USA LLC
14675 Dallas Parkway Suite
150, Dallas, TX 75254
United States

NA Distribution Centre
2601 Lively Blvd,
Elk Grove Village,
IL 60007
United States

(312) 869 7495
+44 (0) 1482 778897
sales@easi-hold.com