





中国认可 国际互认 检测 TESTING CNAS L4743

Test Report

No. AJFS1904003044FF

Date: MAY 29, 2019

Page 1 of 26

LED GROUP

NANGOR ROAD, DUBLIN 12, D12 E7VP, IRELAND

The following sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion. results apply to the sample as received.

Sample Description: LED FIRE RATED DOWNLIGHT

Test Style/Item No.: RRA083060-01;RRA084060-01; RUL07X0-01; RATR0113060-01; RATR0114060-01

Other Info: RUL05X0-01; RUL0530-01; RUL0540-01; RUL0730-01; RUL0740-01;

RUL070WIFI-01;2755312;2755313; 2755314; STLEDDL5CWV2; STLEDDL5WWV2; STLEDDL7WIFI (5W/7W ULTIMUM); RATR6P03038-01; RATR6P04038-01; RATR6P03038NC-01; RATR6P04038NC-01;

RATR8P03038-01; RATR8P04038-01; RATR8P03038NC-01; RATR8P04038NC-01

Test Requested:

Fire Resistance Test of the Loadbearing Timber Floor Assembly Sample, Incorporating Twelve Fire Rated Downlights Fittings, in accordance with BS EN 1365-2-2014 Fire resistance tests for loadbearing elements Part 2: Floors and roofs.

Test Results: -- See attached sheet --

Test Period:

Sample Receiving Date : APR.11, 2019

Test Performing Date : APR.11, 2019 TO APR.20, 2019

Signed for and on behalf of SGS-CSTC Co., Ltd. Anji Branch

Allen Zou Lab Manager





No. AJFS1904003044FF

Date: MAY 29, 2019

Page 2 of 26

1. Introduction

Determine the fire resistance performance of 4500mm*3300mm floor sample in accordance with BS EN 1365-2:2014 Fire resistance tests for loadbearing elements Part 2: Floors and roofs. And the Conditions of Acceptance in accordance with BS EN 1363-1:2012 Fire resistance tests Part 1: General Requirements The specified side of submitted sample was exposed to elevated temperatures as dictated by the BS EN 1363-1 time-temperature curve for a period of 61 minutes under loaded condition.

This test report should be read in conjunction with BS EN 1365-2:2014 Fire resistance tests for loadbearing elements Part 2: Floors and roofs and with BS EN 1363-1:2012 Fire resistance tests Part 1: General Requirements.

The test was conducted on APR.20, 2019.

2. Test Sample

The timber floor had overall nominal dimensions of 4600 mm long by 3300 mm wide and comprised softwood timber joists at 550 mm centres. The upper surface of the floor comprised one layer nominally 18 mm thick Egger chipboard flooring.

The floor assembly was protected on its underside by a direct fixed ceiling, formed from two layers of 12.5mm thick Knauf plasterboard, the layers were screw fixed to the underside of the floor joists.

One layer of 50mm thick rock wool was filled within the cavity between the floor and the ceiling.

The floor supported an evenly distributed load of 50 kg/m².

The ceiling incorporated twelve downlights referenced as follows:

To be continued....



Jnless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/ferms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/ferms-and-Conditions-ferms-e-Document.aspx.xtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forger or faisification of the content or appearance of this document is unleavily and order the prosecuted to the fullest extent of the law, Unless otherwise stated the semblance of the company of the company. Any unauthorized alteration, forger or dashfeating the semblance and such search of the full set of the fullest extent of the law, Unless otherwise stated the semblance and such search of the company of the semblance and such search of the full set of the fu



Test Report No. AJFS1904003044FF Date: MAY 29, 2019 Page 3 of 26

| Specimen No. | Model | Description |
|-----------------|----------------|---|
| А | RRA083060-01 | Size: 85.4mm Ø by 92.7mm Round, fixed downlight, 70 mm cut-out |
| В | RRA084060-01 | Size: 85.4mm Ø by 92.7mm Round, fixed downlight, 70 mm cut-out |
| С | RUL07X0-01 | Size: 84.3mm Ø by 60.2mm Round, fixed downlight, 72 mm cut-out |
| D | RUL07X0-01 | Size: 84.3mm Ø by 60.2mm Round, fixed downlight, 72 mm cut-out |
| Е | RATR0113060-01 | Size: 91.2mm Ø by 106.4mm Round, fixed downlight, 70 mm cut-out |
| F | RATR0114060-01 | Size: 91.2mm Ø by 106.4mm Round, fixed downlight, 70 mm cut-out |

Schedule of Components

(Refer to Figures 1 to 3)

Timber floor assembly (items 1 to 4)

1. Floor Joists

Materials : Softwood Timber Joists

Over section size : 50 mm thick by 200 mm deep

Density of Joist : About 600 kg/m³

Joint centres : 550 mm

2. Floor boards

Manufacturer : Egger

Materials : Egger Chipboard, E1

Thick : 1 layer, 18 mm thick

Size : About 700 kg/m³

: All board screw fixed to all joists using drywall steel screws 55

Fixing method mm long by 3.9 mm diameter screws, at 200 mm centres along

joints and 150 mm centres align perimeter of floor.

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.agy.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined terein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of tensection from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307



Test Report No. AJFS1904003044FF Date: MAY 29, 2019 Page 4 of 26

3. Ceiling boards

Manufacturer : Knauf

Materials : Gypsum plasterboard

Thick : 2 layers, each 12.5mm thick

Size : About 720 kg/m³

: All board joints staggered with respect to adjacent layer and

screw fixed to all joists using drywall steel screws, 35 mm long by

Fixing method 3.9 mm diameter screws for first layer and 55 mm long by 3.9 mm

diameter screws for second layer, at 200 mm centres along joints

and 150 mm centres align perimeter of ceiling.

4. Rockwool

Materials : Rockwool

Thick : 50mm

Size : About 68 kg/m³

Fixing method : Filled into the cavity between the floor and the ceiling

5. Specimen "A"

Product Name : LED FIRE RATED DOWNLIGHT

Model : RRA083060-01

Type : Round, fixed downlight

Overall dimensions and construction : See Figure 2

Hole size in ceiling boards : 70 mm diameter

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgc.com/en/Terms-and-Conditions.aspx and replection for reflection is Documents at http://www.sgc.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307



Test Report No. AJFS1904003044FF Date: MAY 29, 2019 Page 5 of 26

6. Specimen "B"

Product Name : LED FIRE RATED DOWNLIGHT

Model : RRA084060-01

Type : Round, fixed downlight

Overall dimensions and construction : See Figure 2

Hole size in ceiling boards : 70 mm diameter

7. Specimen "C"

Product Name : LED FIRE RATED DOWNLIGHT

Model : RUL07X0-01

Type : Round, fixed downlight

Overall dimensions and construction : See Figure 3

Hole size in ceiling boards : 72 mm diameter

8. Specimen "D"

Product Name : LED FIRE RATED DOWNLIGHT

Model : RUL07X0-01

Type : Round, fixed downlight

Overall dimensions and construction : See Figure 3

Hole size in ceiling boards : 72 mm diameter

9. Specimen "E"

Product Name : LED FIRE RATED DOWNLIGHT

Model : RATR0113060-01

Type : Round, fixed downlight

Overall dimensions and construction : See Figure 4 and 5

Hole size in ceiling boards : 70 mm diameter

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgc.com/en/Terms-and-Conditions.aspx and replection for reflection is Documents at http://www.sgc.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307



Test Report No. AJFS1904003044FF Date: MAY 29, 2019 Page 6 of 26

10. Specimen "F"

Product Name : LED FIRE RATED DOWNLIGHT

Model : RATR0114060-01

Type : Round, fixed downlight

Overall dimensions and construction : See Figure 4 and 5

Hole size in ceiling boards : 70 mm diameter

The preparation of tested assembly took place in the test laboratory over a total combined time of 3 days. Throughout this period of time both the temperature and the humidity of the laboratory were measured and recorded as being within a range of from 16°C to 29°C and 54% to 58% respectively. The tested sample was supported on the horizontal furnace with an opening of the 3000mm by 4200mm. The all around of the furnace wall was covered by ceramic fibre cotton. The tested sample was asymmetrical. At the request of client, the sample was mounted such that underside (plasterboard ceiling) towards to the heating conditions of the test.

To be continued....






No. AJFS1904003044FF

Date: MAY 29, 2019

Page 7 of 26

Figure 1 - General Plan of Test Sample from Unexposed Face and Thermocouple Positions

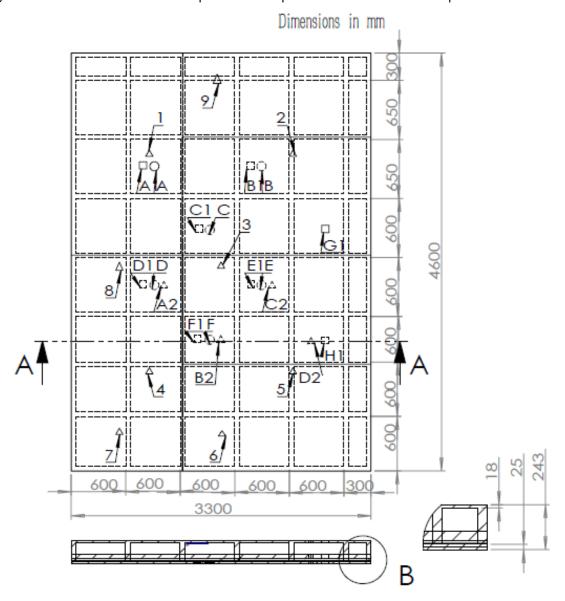

thermocouples at mid—cavity, adjacent to each downlight
surface mounted thermocouples on upper surface of floorboards
surface mounted thermocouples(additional)

To be continued....





Jnless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/enfems-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/ferms-e-Document.aspx.xtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined there. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unleavily and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seulis shown in his test report refer only to the sample(s) tested and such sample(s) are retained follows.



Test Report No. AJFS1904003044FF Date: MAY 29, 2019 Page 8 of 26

Figure 2 - Details of Specimens 'A' (RRA083060-01) & 'B'(RRA084060-01) Downlights

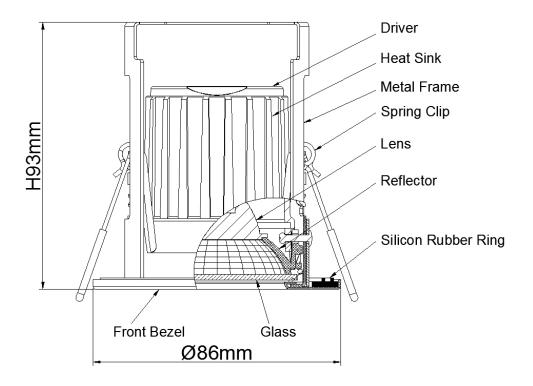

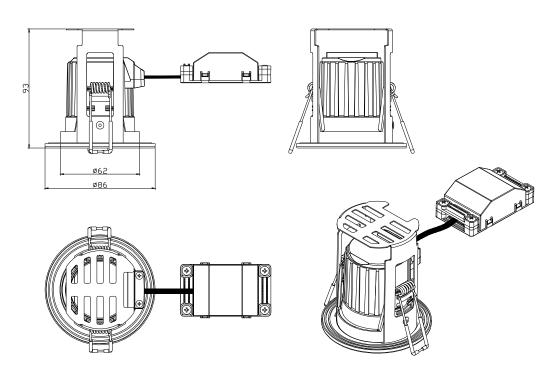

To be continued....




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apy.and, for electronic Format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined rein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018825 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



Test Report No. AJFS1904003044FF Date: MAY 29, 2019 Page 9 of 26

Figure 3 - Details of Specimens 'C' & 'D' Downlights (RUL07X0-01)

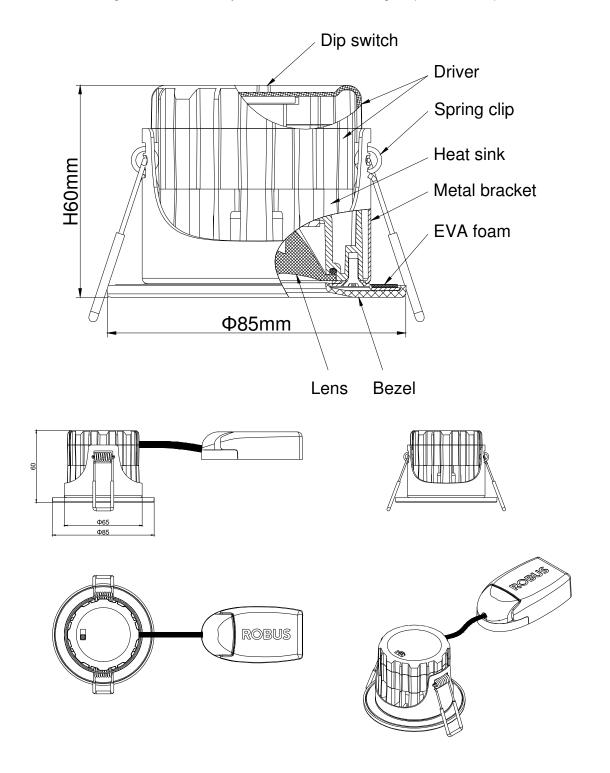

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspy.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspy.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018825 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com




No. AJFS1904003044FF

Date: MAY 29, 2019

Page 10 of 26

Figure 4 - Details of Specimens 'E'(RATR0113060-01) & 'F' (RATR0114060-01) Downlights

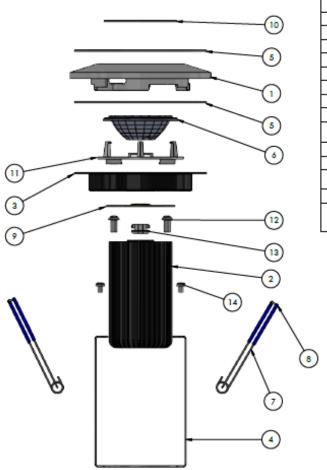

| ITEM NO. | PART NUMBER | DESCRIPTION | 11W/QTY. |
|----------|--|-----------------------------|----------|
| 1 | RATR.001.000.001 | Bevel | 1 |
| 2 | RATR.001.000.023 | Heat Sink 11W | 1 |
| 3 | RATR.001.000.002 | LED Holding Platfrom | 1 |
| 4 | RATR.001.000.022 | Clamp Plate 11W | 1 |
| 5 | RATR.001.000.009 | Outter Seal | 2 |
| 6 | RATR.001.000.006 | LEDChroic 38/60 Degree lens | 1 |
| 7 | RATR.001.000.007 | Spring Clamp | 2 |
| 8 | RATR.001.000.011 | Spring Clamp Grip | 4 |
| 9 | RATR.001.000.021 | DOB Light Engine 11W | 1 |
| 10 | RATR.001.000.008 | Flat Seal | 1 |
| 11 | RATR.001.000.010 | Board Protector | 1 |
| 12 | round cross head screw_ks | M4 Cross Head | 2 |
| 13 | RATR.001.000.012 | Wire Gromet | 1 |
| 14 | B18.6.7M - M3 x 0.5 x 4 Type I Cross Recessed PHMS4N | M3 Cross Head | 2 |

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-

| No. 301, Sunlight Read, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国・浙江・安吉县阳光工业図二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com




No. AJFS1904003044FF

Date: MAY 29, 2019

Page 11 of 26

Figure 5 - Details of Specimens 'E' (RATR0113060-01) & 'F' (RATR0114060-01) Downlights

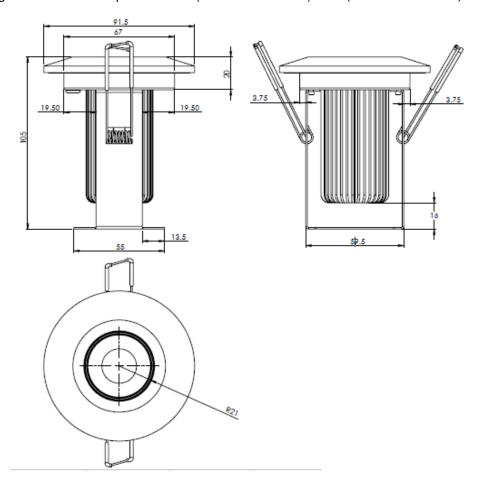

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined rein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not expense to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgory or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji Courty, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018825 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 12 of 26

3. Test Procedure

The test was conducted in accordance with the procedure specified in BS EN 1363-1:2012, Clause 10.

The furnace was controlled so that the mean furnace temperature, deviation from the mean furnace temperature and uniformity of temperature distribution complied with the requirement of EN 1365-2. Fourteen furnace thermocouples were used to determine the mean furnace temperature.

The temperature of the unexposed face was monitored by means of 9 thermocouples fixed to the unexposed surface of the sample. No.1, 2, 3, 4, 5 thermocouples will be used to calculate the mean temperature rise of the sample. All thermocouples were used to determine the maximum temperature of the unexposed surface of the sample.

The locations and reference numbers of the various unexposed surface and internal thermocouples are shown in Figure 1.

A roving thermocouple was available to measure temperatures on the unexposed surface of the sample at any position which might appear to be hotter than the temperatures indicated by the fixed thermocouples.

Cotton pads and gap gauges were available to evaluate the compliance with the integrity criterion of the sample to hot gases. The occurrence of sustaining flaming on the unexposed surface was also checked to determine compliance with the integrity criterion.

Based on the requested of client, the total load 760 kg was applied by weights (Frame and Weights), uniformly distributed over the unexposed surface of test sample.

The deflection, D, was measured from the commencement of heating by distance meter recorded at least one reading per minute, which placed in the centre of the unexposed surface of the tested sample.

During the test, the temperatures, pressures and deflection were continuously monitored and were recorded at one minute intervals.

To be continued....





No. AJFS1904003044FF

Date: MAY 29, 2019

Page 13 of 26

4. Test Results

The following data were recorded during the test:

- a) The actual mean furnace temperature/time curve as well as the standard furnace temperature/ time curve, which were shown in Figure 6. The mean temperatures recorded within the furnace were shown in Table 1.
- b) The mean and maximum temperature rise of the unexposed surface of the sample was shown in Figure 7. The individual temperatures recorded on the unexposed surface of the sample were shown in Table 2.
- c) The individual temperatures recorded adjacent to the downlight fittings at the mid-height of the cavity were shown in Table 3.
- d) The deflection of the centre of the unexposed surface of the tested sample was shown in Figure 8. The individual deflections recorded on the unexposed surface of the sample were shown in Table 4.

The ambient air temperature in the vicinity of the test construction was 26°C at the start of the test with variation of 1°C during the test.

A summary of the observations made on the general behavior of the sample was given in Table 5.

To be continued....






No. AJFS1904003044FF

Date: MAY 29, 2019

Page 14 of 26

Figure 6 - Standard and actual Mean Furnace Temperature/Time Curve

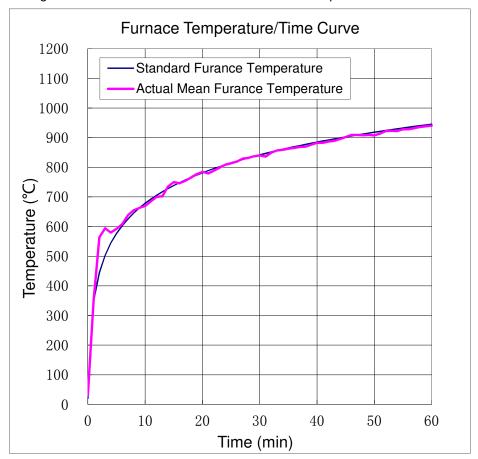

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sas.com/en/Terms-and-Conditions.apid, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions.for=ms-en-Document.apid. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor of fallification of the content of appears are of this document is ninewith and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the research of the content of the law. The company of the content of the law. The properties stated the research of the law. The properties of the law. The prop




No. AJFS1904003044FF

Date: MAY 29, 2019

Page 15 of 26

Figure 7 – Unexposed Surface Mean and Maximum Temperature Rise / Time Curve

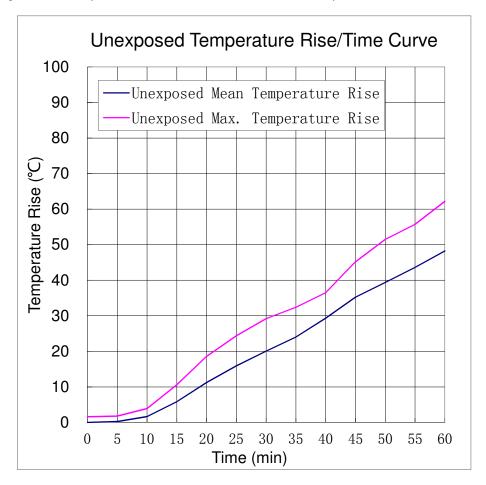

To be continued....




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sas.com/en/Terms-and-Conditions.apid, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions.for=ms-en-Document.apid. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor of fallification of the content of appears are of this document is ninewith and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the research of the content of the law. The company of the content of the law. The properties stated the research of the law. The properties of the law. The prop




No. AJFS1904003044FF

Date: MAY 29, 2019

Page 16 of 26



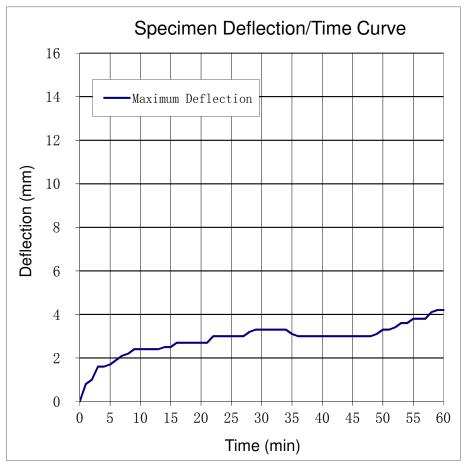

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 17 of 26

Table 1 Average Temperatures Recorded within the Furnace

| Time (mins) | BS 476-20 Std Average (°C) | Furnace Average (°C) | Error (%) |
|----------------|-------------------------------|-------------------------|-----------|
| 0 | 20 | 30.9 | |
| 5 | 576 | 592.3 | 12.8% |
| 10 | 678 | 669.5 | 5.7% |
| 15 | 739 | 750.0 | 3.2% |
| 20 | 781 | 784.3 | 2.3% |
| 25 | 815 | 813.6 | 1.6% |
| 30 | 842 | 840.0 | 1.3% |
| 35 | 865 | 862.5 | 1.0% |
| 40 | 885 | 882.0 | 0.8% |
| 45 | 902 | 901.9 | 0.6% |
| 50 | 918 | 907.6 | 0.5% |
| 55 | 932 | 927.9 | 0.4% |
| 60 | 945 | 940.2 | 0.3% |

Table 2 Individual Temperatures on the Unexposed Surface of the Sample

| Time | Temperatures (°C) | | | | | | | | | | |
|--------|-------------------|------|------|------|------|------|------|------|------|--|--|
| (mins) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | |
| 0 | 27.3 | 25.9 | 26.8 | 25.7 | 26.3 | 26.2 | 26.1 | 26.1 | 28.0 | | |
| 5 | 27.5 | 26.2 | 26.9 | 26.0 | 26.6 | 26.4 | 26.2 | 26.3 | 28.2 | | |
| 10 | 30.3 | 26.6 | 27.5 | 26.5 | 29.4 | 27.2 | 26.5 | 27.5 | 28.6 | | |
| 15 | 33.5 | 30.1 | 29.6 | 31.0 | 37.0 | 29.4 | 27.0 | 32.5 | 29.3 | | |
| 20 | 36.5 | 35.7 | 32.4 | 38.5 | 45.0 | 32.1 | 28.1 | 36.8 | 31.0 | | |
| 25 | 40.4 | 40.5 | 35.5 | 44.3 | 50.8 | 35.2 | 30.1 | 40.9 | 33.4 | | |
| 30 | 45.0 | 44.1 | 39.4 | 48.3 | 55.6 | 38.7 | 33.4 | 44.8 | 36.9 | | |
| 35 | 49.7 | 47.7 | 45.5 | 50.5 | 58.8 | 42.0 | 37.0 | 48.3 | 41.6 | | |
| 40 | 53.9 | 50.3 | 58.1 | 53.4 | 62.9 | 49.6 | 41.3 | 52.0 | 46.7 | | |
| 45 | 58.0 | 53.5 | 71.6 | 57.0 | 68.0 | 55.2 | 46.3 | 55.3 | 51.3 | | |
| 50 | 59.7 | 56.7 | 77.9 | 62.0 | 72.6 | 59.6 | 50.3 | 59.8 | 54.9 | | |
| 55 | 63.9 | 61.9 | 82.1 | 66.0 | 76.2 | 63.1 | 56.8 | 65.3 | 58.7 | | |
| 60 | 67.6 | 66.3 | 88.6 | 71.4 | 79.3 | 66.2 | 69.4 | 77.8 | 62.9 | | |

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Forms-and-Conditions.appx.and-Conditions.appx.and-Forms-and-Conditions.appx.and-Conditions.appx.and-Forms-and-Conditions.appx.and-Conditions.appx.and-Forms-and-Conditions.appx.and-Conditions.appx.and-Forms-and-Conditions.appx.and-Condition



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 18 of 26

Table 3 Individual Temperatures Recorded Adjacent to the Downlight Fittings at Mid-height of the Cavity and sponsor Additional

| Time | Mid-Cavity Thermocouples (°C) | | | | | | Additio | nal Ther | mocoupl | es (°C) | | |
|-------|-------------------------------|-------|-------|-------|-------|-------|---------|----------|---------|---------|------|------|
| (min) | A1 | B1 | C1 | D1 | E1 | F1 | G1 | H1 | A2 | B2 | C2 | D2 |
| 0 | 29.7 | 29.9 | 33.4 | 27.3 | 27.4 | 27.1 | 31.3 | 37.0 | 26.5 | 26.3 | 27.4 | 27.7 |
| 5 | 43.8 | 32.2 | 77.8 | 30.7 | 37.2 | 33.3 | 41.4 | 61.3 | 26.7 | 26.9 | 29.7 | 28.5 |
| 10 | 67.8 | 59.2 | 104.7 | 56.0 | 45.3 | 60.7 | 79.2 | 73.7 | 30.5 | 29.6 | 36.2 | 35.4 |
| 15 | 82.3 | 76.6 | 120.2 | 74.4 | 68.2 | 88.4 | 87.8 | 85.7 | 40.5 | 38.1 | 42.5 | 38.4 |
| 20 | 87.9 | 84.8 | 128.2 | 81.7 | 82.9 | 94.7 | 98.1 | 86.8 | 49.9 | 45.7 | 49.7 | 41.6 |
| 25 | 100.1 | 97.5 | 146.4 | 87.7 | 109.5 | 100.7 | 120.1 | 86.5 | 54.9 | 49.8 | 60.5 | 46.0 |
| 30 | 116.9 | 121.5 | 149.2 | 108.7 | 122.1 | 110.8 | 148.3 | 102.7 | 57.5 | 53.8 | 69.4 | 50.6 |
| 35 | 122.8 | 145.5 | 153.8 | 148.1 | 138.1 | 121.8 | 176.4 | 121.4 | 58.2 | 59.2 | 70.3 | 55.2 |
| 40 | 154.0 | 173.6 | 157.7 | 170.8 | 198.5 | 169.3 | 202.5 | 130.3 | 59.2 | 63.8 | 72.4 | 59.7 |
| 45 | 170.9 | 211.4 | 203.4 | 250.9 | 299.1 | 295.7 | 292.4 | 139.1 | 62.2 | 65.8 | 74.9 | 61.8 |
| 50 | 268.4 | 325.7 | 304.8 | 348.3 | 465.3 | 424.5 | 340.0 | 189.8 | 64.0 | 67.4 | 78.6 | 62.8 |
| 55 | 358.4 | 432.5 | 414.7 | 414.4 | 580.9 | 475.3 | 387.5 | 263.1 | 64.9 | 68.9 | 82.2 | 63.5 |
| 60 | 427.5 | 525.6 | 595.4 | 478.3 | 640.9 | 526.7 | 435.1 | 476.8 | 65.6 | 69.3 | 83.7 | 64.5 |

Table 4 Deflection Recorded on the Unexposed Surface of the Sample

| Time (mins) | Deflection (mm) | Rate of Deflection (mm/min) |
|----------------|--------------------|-----------------------------|
| 0 | 0.0 | |
| 5 | 1.7 | 0.1 |
| 10 | 2.4 | 0.0 |
| 15 | 2.5 | 0.0 |
| 20 | 2.7 | 0.0 |
| 25 | 3.0 | 0.0 |
| 30 | 3.3 | 0.0 |
| 35 | 3.1 | -0.2 |
| 40 | 3.0 | 0.0 |
| 45 | 3.0 | 0.0 |
| 50 | 3.3 | 0.2 |
| 55 | 3.8 | 0.2 |
| 60 | 4.2 | 0.0 |

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Frems-e-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its invervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alternation, forgery or faisification of the content results show in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 19 of 26

Table 5 Observations Made during the Test

| Time (min:sec) | Observations |
|-------------------|---|
| 00:00 | Furnace Fired |
| 02:15 | Slight smoke released from the joints between the joists and flooring |
| 08:00 | The downlight surface is all carbonized and discolored. |
| 15:10 | The outer layer plasterboard of exposed face cracked. |
| 20:00 | The outer layer plasterboard the middle part starts to fall off. |
| 29:30 | The outer layer plasterboard the increased fall off. |
| 42:00 | The outer layer plasterboard on exposed face detached increased, and some flame was issued from the joints at the centre of flooring. |
| 56:00 | The second layer plasterboard began to fall off. |
| 60:00 | The sample maintained the loadbearing capacity and kept integrity and insulation. |
| 61:00 | Test was terminated as per sponsor requirement. |

5. Performance Criteria (BS EN1363-1:2012, Clause 11)

The performance of the sample was assessed against the criteria for integrity and insulation in accordance with BS EN1363-1:2012, Clause 11.

Loadbearing Capability:

Failure to support the load is deemed to have occurred when both of the following criteria have been exceeded.

Limiting deflection, =L²/400d = 181.2 mm,

And,

Limiting rate of deflection, =L²/9000d = 8.07 mm/min,

Where,

L is the clear span of the test sample, in millimetres; L=4200 mm

d is the distance from the extreme fibre of the design compression zone to the extreme fibre of the design tensile zone of the structural section, in millimetres. d=243 mm

To be continued....



Jnless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/ferms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/ferms-and-Conditions-ferms-e-Document.aspx.xtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forger or faisification of the content or appearance of this document is unleavily and order the prosecuted to the fullest extent of the law, Unless otherwise stated the semblance of the company of the company. Any unauthorized alteration, forger or dashfeating the semblance and such search of the full set of the fullest extent of the law, Unless otherwise stated the semblance and such search of the company of the semblance and such search of the full set of the fu



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 20 of 26

Integrity: Failure is deemed to occur:

- a) When collapse occurs; or
- b) When sustained flaming for not less than 10s on the unexposed surface occurs; or
- For situations where the cotton pad is suitable, when flames and/or hot gases cause flaming or glowing
 of the cotton fibre pad; or
- d) For situations where the cotton pad is not suitable, when either:
 - i) the 6 mm diameter gap gauge can penetrate a through gap such that the end of the gauge projects into the furnace and the gauge can be moved in the gap for a distance of at least 150 mm; or
- ii) the 25 mm diameter gap gauge can penetrate a through gap such that the end of the gauge projects into the furnace.

Insulation: Failure is deemed to occur:

- a) When the mean unexposed surface temperature rise more than 140 K; or
- b) When the temperature rise recorded at any position on the unexposed surface, ether by a fixed thermocouple or by the roving thermocouple is in excess of 180 K; or
- c) When integrity failure occurs.

6. Conclusion

The tested sample has been subjected to a fire resistance test in accordance with BS EN 1365-2:2014 Fire resistance tests for loadbearing elements Part 2: Floors and roofs.

During the heating period of 60 minutes, the maximum deflection was 9.5mm and the maximum rate of deflection was 1.3 mm/min. No collapse and sustained flaming were occurred. The mean temperature rise of unexposed surface was 44.5°C and the maximum temperature rise was 47.2°C.

The fire resistance performance of the sample was judged against the criteria for insulation and integrity as specified in BS EN 1363-1:2012 chapter 11 of this report, and the sample satisfied the performance requirements for the following period:

| Loadbearing capacity | Integrity | Insulation |
|----------------------|--------------|--------------|
| ≥ 60 minutes | ≥ 60 minutes | ≥ 60 minutes |

The test was terminated after a period of 61 minutes as requested by the test sponsor.

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on requestor accessible at https://www.sgs.com/en/Terms-and-Conditions.py.gand. for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions.py.gand-co



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 21 of 26


7. Limitation

The results only relate to the behaviour of the sample of the element of construction under the particular conditions of the test. They are not intended to be the sole criteria for assessing the potential fire performance of the element in use nor do they reflect the actual behaviour in fires.

The test results relate only to the sample tested. The fire resistance performance of sample of this design may change if different dimensions, different gaps, incorporating different components, or mounted within different wall construction.

The sample was asymmetrical and was tested such that the specified surface towards the heating conditions of the test. The test result may not be appropriate to situation other side towards the heating conditions.

Appendix - Photographs

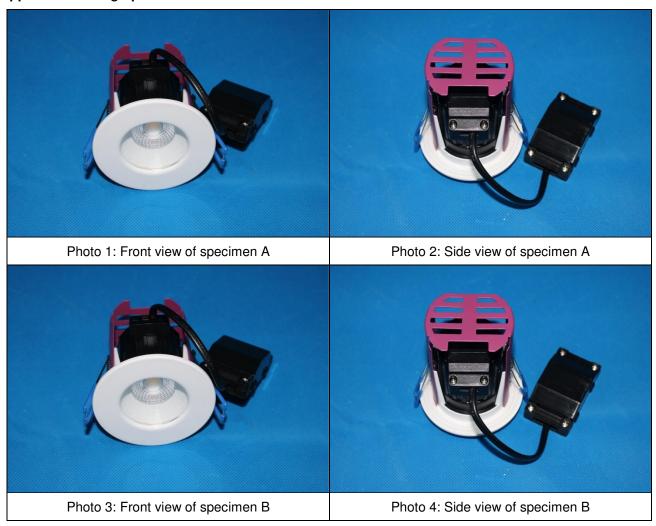


To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apy.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined rein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appears are of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the state of the law. Unless otherwise stated the state of the law. The company of the company and the company of the company o



Test Report No. AJFS1904003044FF Date: MAY 29, 2019 Page 22 of 26

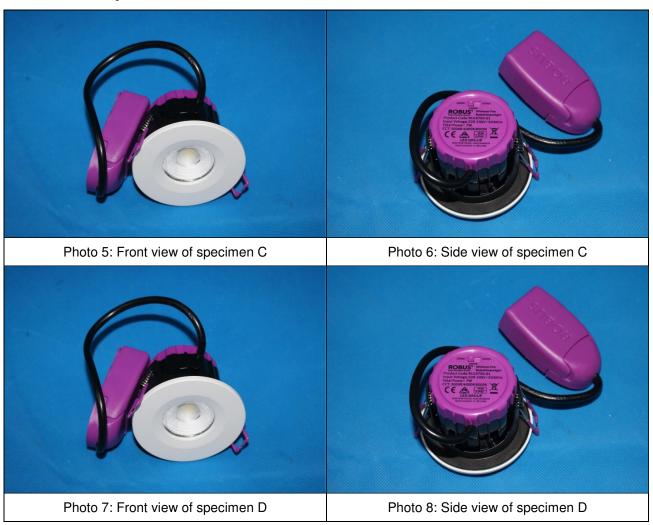

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, foreyor or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji Courty, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018825 www.sgsgroup.com.cn 中国・浙江・安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 23 of 26

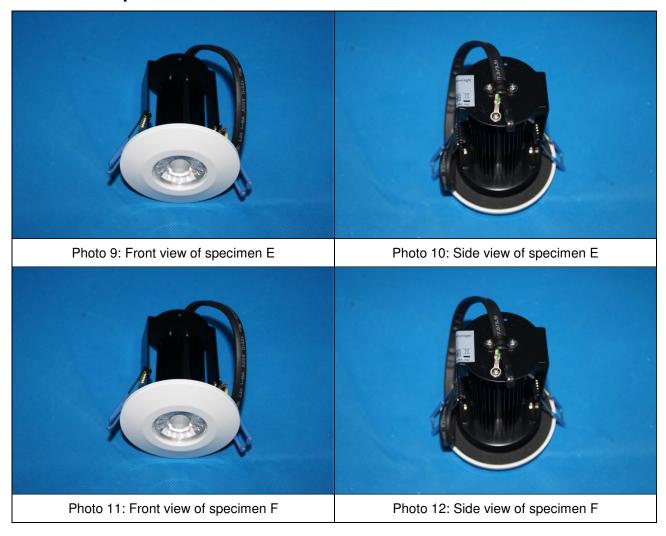

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sas.com/en/Terms-and-Conditions.apid, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions.for=ms-en-Document.apid. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor of fallification of the content of appears are of this document is ninewith and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the research of the content of the law. The company of the content of the law. The properties stated the research of the law. The properties of the law. The prop



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 24 of 26





Photo 13: The unexposed face before the test

Photo 14: The exposed face before the test








Photo 16: The unexposed face of sample (Test start)

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its invertexention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn

中国·浙江·安吉县阳光工业园二区阳光大道301号

邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 25 of 26



Photo 17: The exposed face of sample (After test duration of 10 & 20 minutes)



Photo 18: The unexposed face of sample (After test duration of 20 minutes)



Photo 19: The exposed face of sample (After test duration of 30 & 40 minutes)



Photo 20: The unexposed face of sample (After test duration of 40 minutes)

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its internation only and within the limits or Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 830

中国・浙江・安吉县阳光工业园二区阳光大道301号

邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



No. AJFS1904003044FF

Date: MAY 29, 2019

Page 26 of 26








Photo 22: The unexposed face of sample (After test duration of 60 minutes)

SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its invertexention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307